



StableCamper Back-Stop Installation

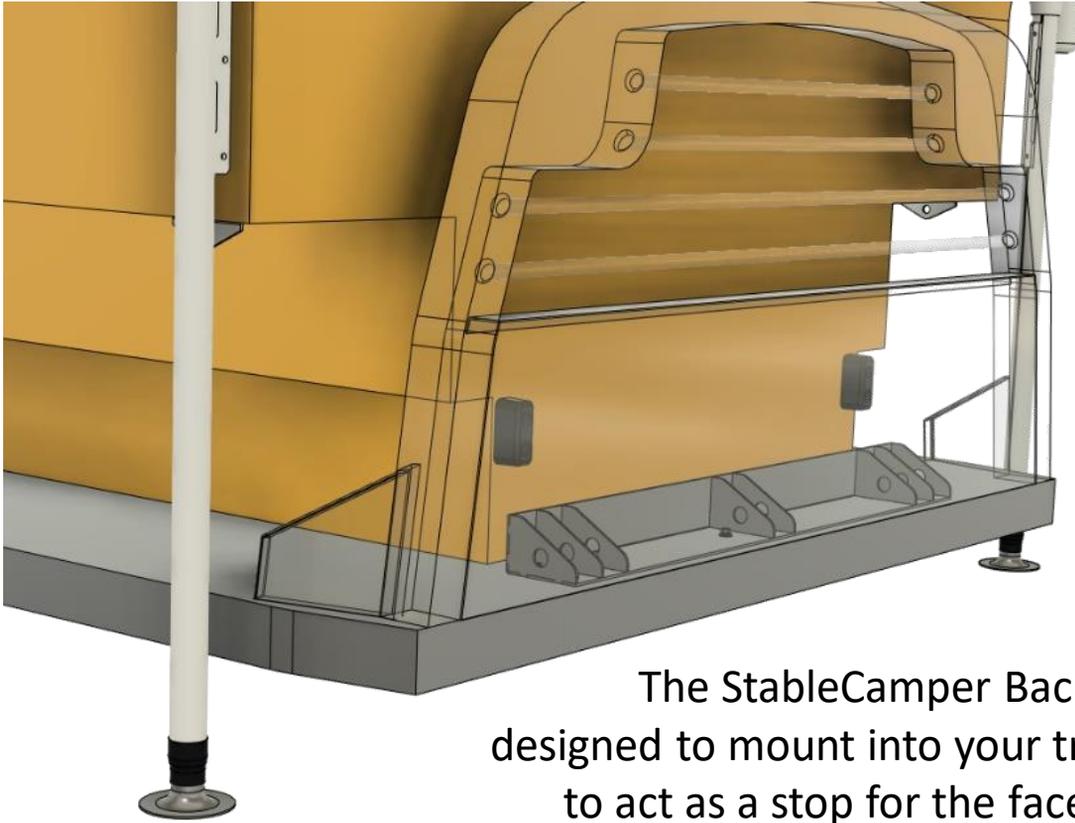

The StableCamper Back-Stop is designed to mount into your truck bed to act as a stop for the face of your camper to rest against while loaded onto your truck.

Placement of the Back-Stop is determined by the installer and will vary depending the where the installer wants the camper to sit on the truck bed. Care and thoughtful planning should be taken when determining the mounting location of the Back-Stop.

The Back-Stop is 4 inches by 6 inches and can be installed in the vertical or horizontal orientation as show here in the following image.

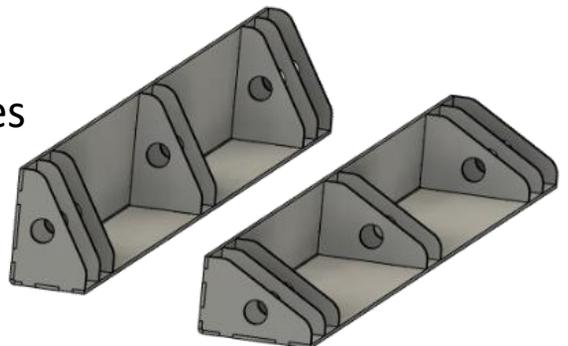

The StableCamper Back-Stop kit includes the Back-Stop assembly and all mounting hardware


ITEM	QTY
Back-Stop ASM	1
3/8-16 Hex Bolt	6
3/8 Flat Washer	12
3/8 Lock Nut	6
0.386" Drill Bit	1



Hardware installation orientation

Bolts should be tightened to normal tightness not exceeding normal 3/8-16 torque spec of 23 ft/lbs

Bolting the Back-Stop in place with the supplied 6 sets of hardware should look something like the illustration below.

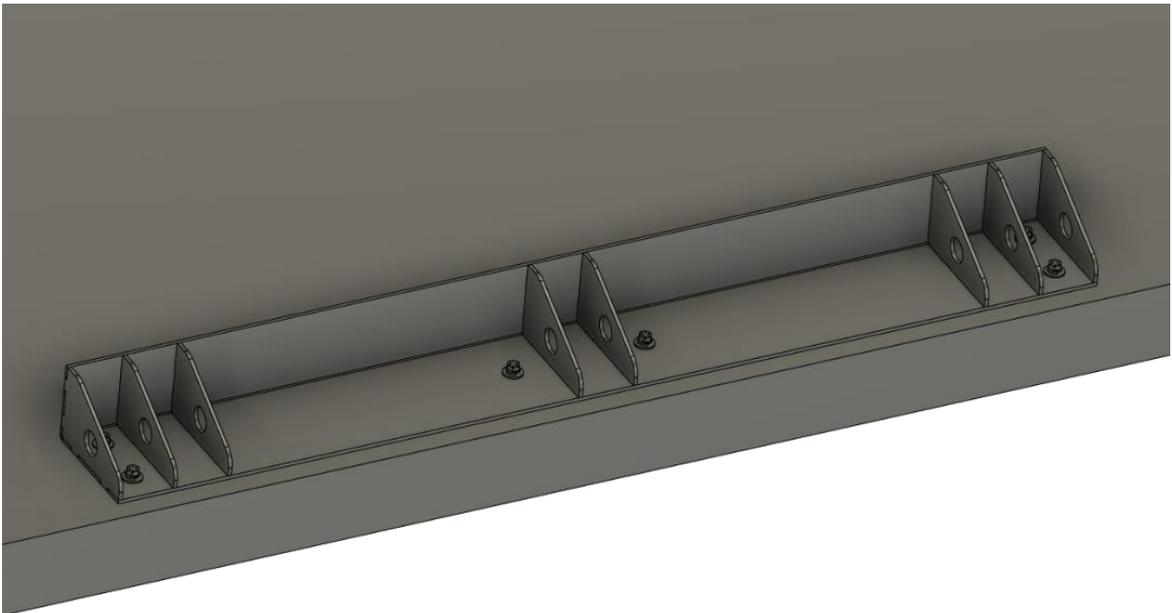


Care must be taken in choosing bolt locations to ensure there are no obstructions under the truck deck that would not allow the hardware to fit properly in place. The underside of the truck deck should be examined, and measurements taken to ensure proper bolt locations are made.

Back Stop Placement

To locate the position of the Back Stop to the bed, start by measuring the base of your camper. This measurement should go along the bottom of the camper from front to back.

Be sure to include any bumpers on the face of the camper and measure back to any obstruction protruding from the bottom of the camper. This could include plumbing,

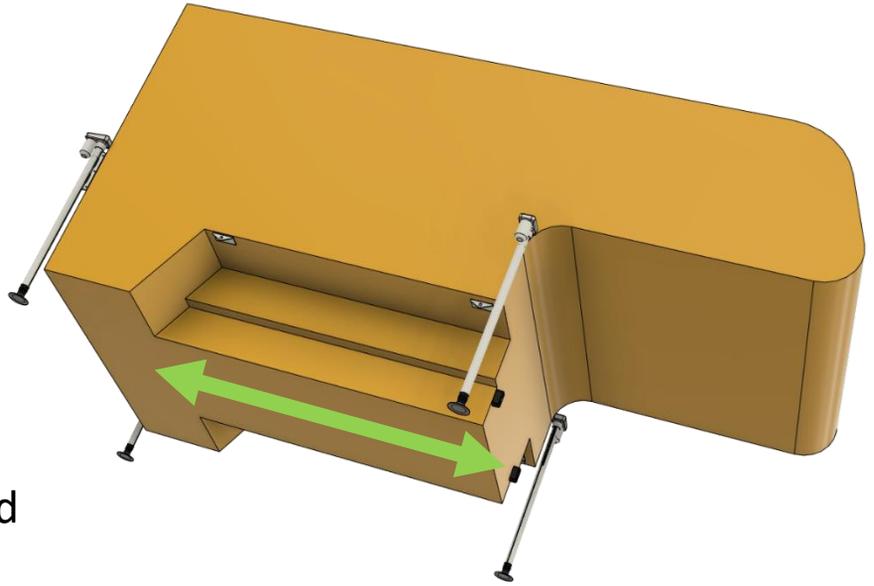

generator pan, or any brackets that may hang below the camper.

Using this measurement, place the Back Stop the same measurement from the back of the bed to face of the Back

Stop the same measurement from the back of the bed to face of the Back Stop. We suggest that you **subtract 1"** to allow for added clearance between your camper and the end of the bed. For side to side, that Back Stop should be centered in the bed.

